




1. Before Installing

Ensure that you have:

- AudioCodes Fax ATA, model MP-202B HTTPSFAX
- Included 12V power adapter
- Local network (LAN) with DHCP and Internet connection
- Fax machine or fax-capable MFP

2. Connecting the ATA

1. Connect the Ethernet port labeled **WAN** into your network.

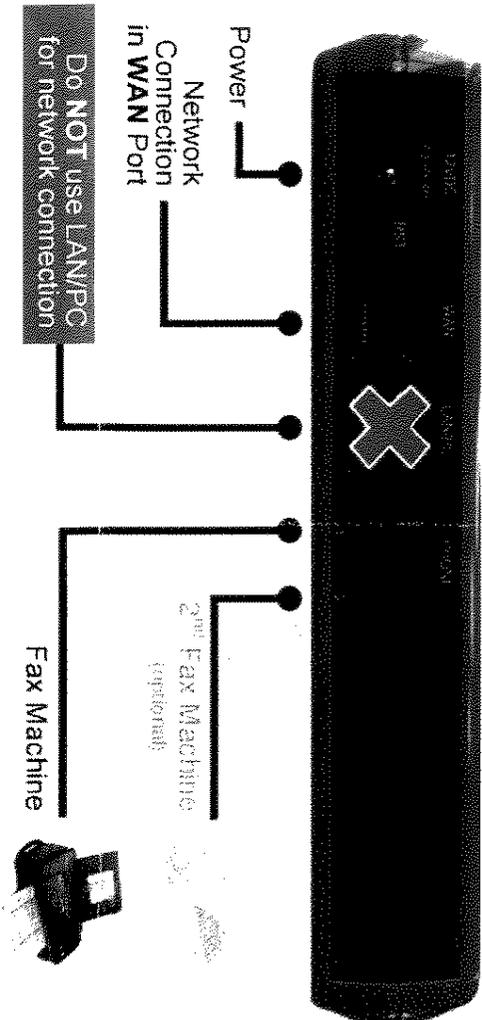

2. Connect the telephone port labeled **PHONE 1** to the line port on your fax machine.
3. (Optional) If your ATA is configured for two fax accounts, connect the telephone port labeled **PHONE 2** to the line port on your second fax machine (or second line, if you have a two-line fax machine).
4. Connect the power cable to the **12VDC** port on the ATA. There is no ON/OFF (I/O) switch, so the fax ATA turns on as soon as you connect the power. The **POWER** light on the front of the ATA will turn green when the device is plugged in. If this light does not come on, please double-check your connections.
5. Wait for all 3 status lights on the front of the ATA to turn green. This could take as long as 5 minutes while the device pulls down its configuration and updates its firmware.

